



High density Birch Plywood panels featuring a consistent grain structure and optimum strength to weight ratio.

HD Contract Flooring Plywood is ideal for load-bearing decks or subfloor applications.

Specific engineering data including bending strength and modulus elasticity are provided within this range of panels, thus making them ideal for a multitude of structural flooring applications.

HD CONTRACT
Floor Deck Plywood™

SPECIFICATION DETAIL:

Thicknesses(mm) 4 6 6.5 8 9 12 15 18 21 24 27 30 35

Number of Plies 3 5 5 6/7 7 9 11 13 15 17 19 21 25

Average density Approx. 700 kg/m³

Product standard EN 636-2

Glue bond EN 314-2 Class 3 (Exterior)

Formaldehyde release Class E1 (Tested to EN 717-2) - CARB Phase 2 compliant (On Request)

Moisture content 8%-10% at manufacture

Core Uniform and consistent core construction

Environmental certification FSC® & PEFC™ available

European Timber Regulation (EUTR) status: Compliant

CE marked BS EN 13986

Material safety data sheet Available

CONTACT:

Drakes Industrial Estate
Shay Lane, Halifax
West Yorkshire
HX3 6RL


Tel: 01422 330444
Fax: 01422 330706
Email: sales@hanson-plywood.co.uk
www.hanson-plywood.co.uk




For more information visit:
www.hanson-plywood.co.uk

April 2021

Mean Modulus of Elasticity

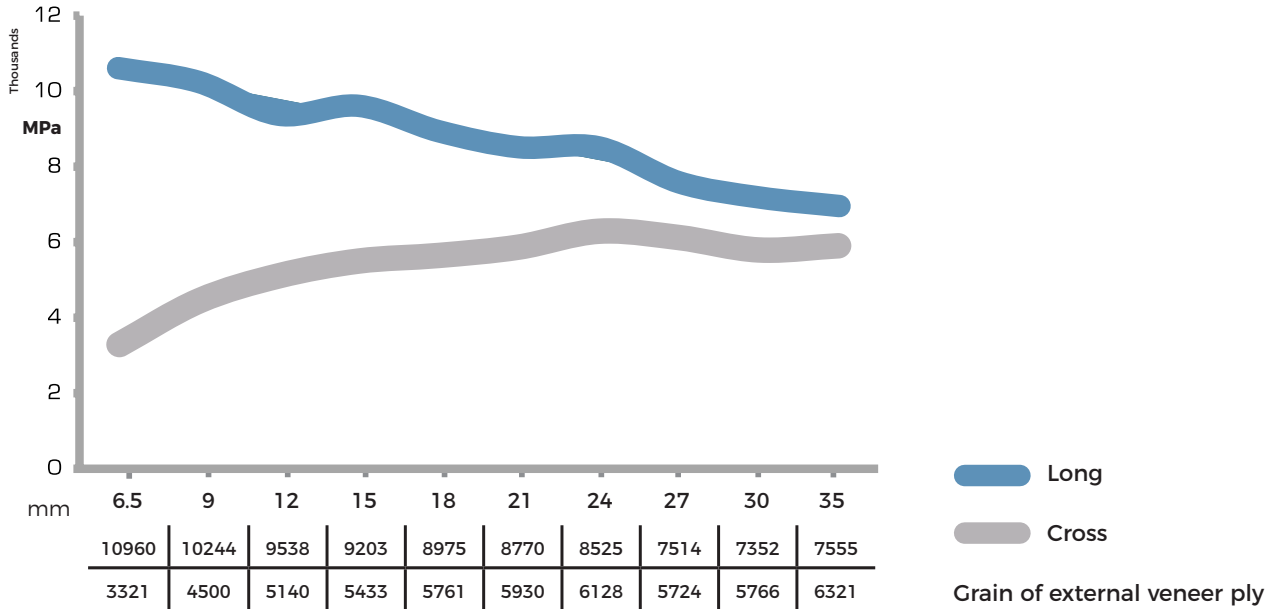

Bending Strength

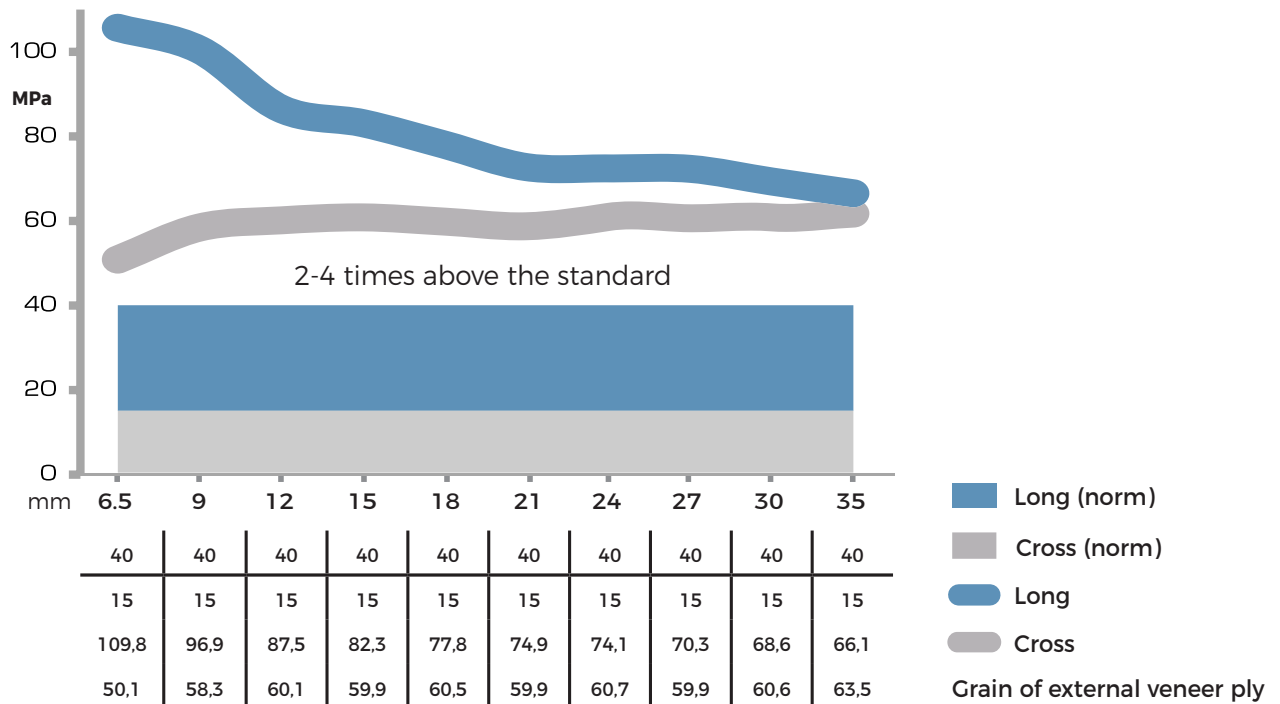

For more information visit: www.hanson-plywood.co.uk